

HE




TYPICAL APPLICATIONS	Function selector switch
WIRING DIAGRAMAS	2 - 14 positions Rast 5 connectors
GWFI	850 °C
GWIT	750 °C

Rotary switches with a wide range of configurations. 6 types of housing available, different for the maximum number of contacts. HE series is automatically assembled in a great variety of configurations.

- Function selector switch
- Child lock - push to turn feature on demand
- Coupling with encoder available
- Flexibility of wiring diagrams
- Different "click" or frictional feeling
- Metal or plastic shafts with different lengths: 12,5 - 46 mm (standard shafts protude: 23 mm)

EXAMPLE OF 11HE WITH 8 CONTACTS

Easy wiring with multiple plug (Rast 5) or single terminals 6,3 mm

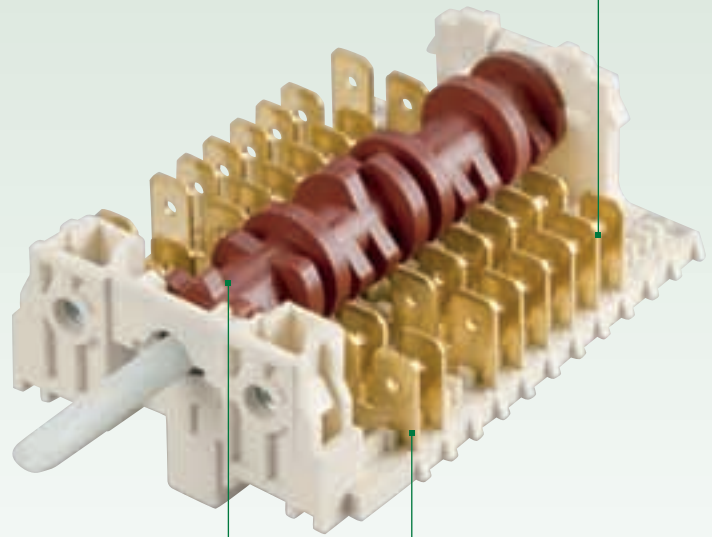

2 - 14 positions

Standard double contact

Rating

16 A / 250 VAC - 10E3
 12 A / 400 VAC - 30E3
 0,25 A / 250 VAC - 30E3
 T150 °C


16 A / 250 VAC
 T120 °C

According to
 EN61058-1 standard



TYPICAL TERMINALS

- Single terminals
- Double terminals
- Chopped
- left
- center
- right

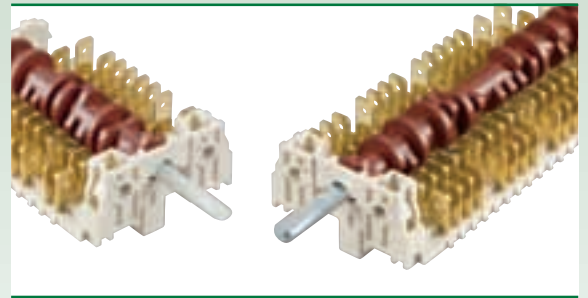


TYPES OF SHAFT

Plastic


Metal

DIMENSIONS

Standard version

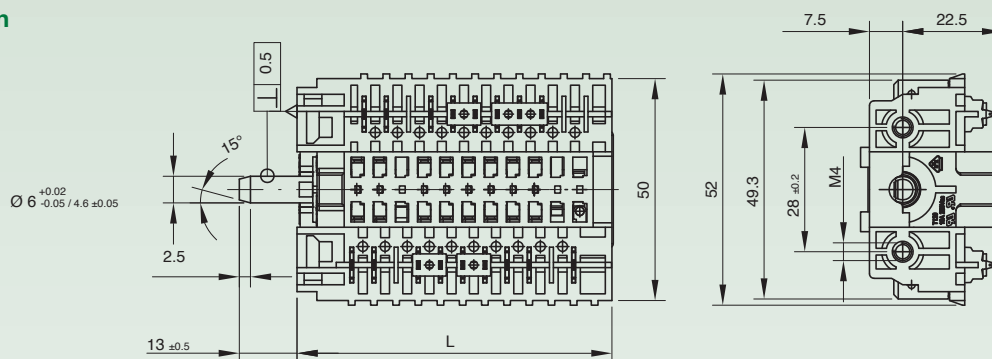

Thermostat version

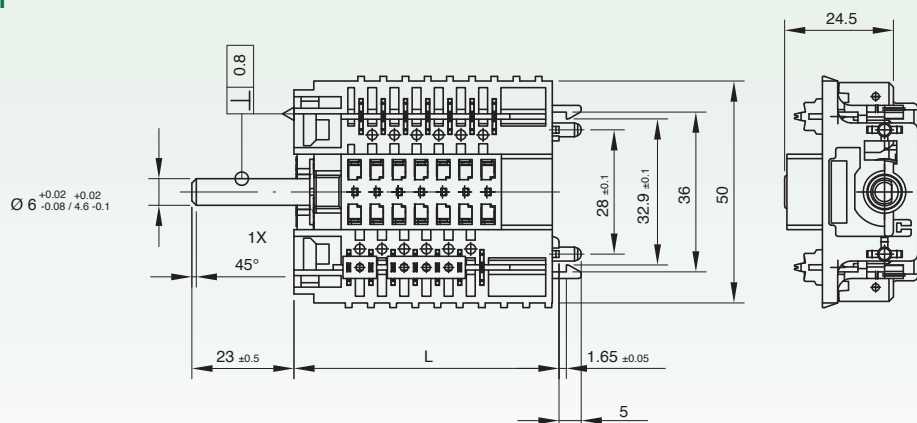


TECHNICAL FEATURES

Version	No. contacts	Length	
		L	L thermostat version
3HE	up to 3	30	38
5HE	up to 5	40	48
7HE	up to 7	50	58
11HE	up to 11	70	78
15HE	up to 15	90	98
19HE	up to 19	110	118


OPTIONS

Higher number of contacts, multiple versions, possibility to use accessories are the main features of HE series.

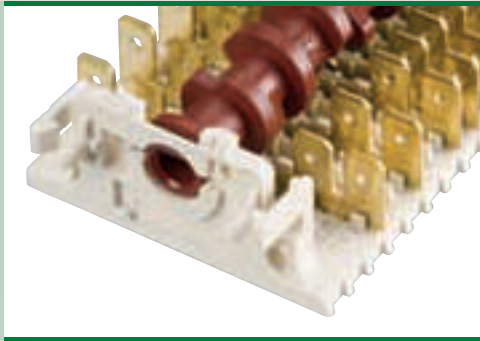


Body with accessory holder

- Possibility to use in conjunction with a capillary thermostat or an encoder

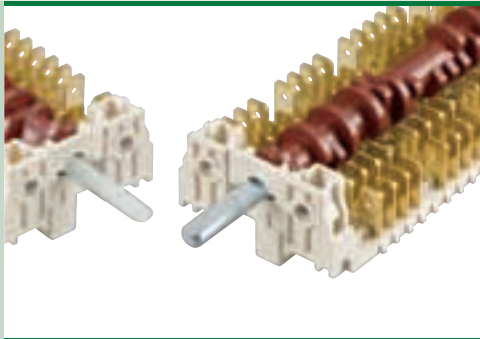


Shaft

- Metal or plastic shaft with length on demand (12.5 - 46 mm)
- Standard shaft length: 23.5 mm

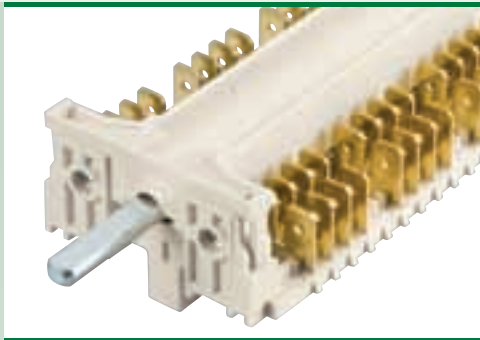


Cam cover

- Cam cover protects cam and contacts from dirt and waste of cooking.
- Note: cam cover is available for 11 and 19 versions.

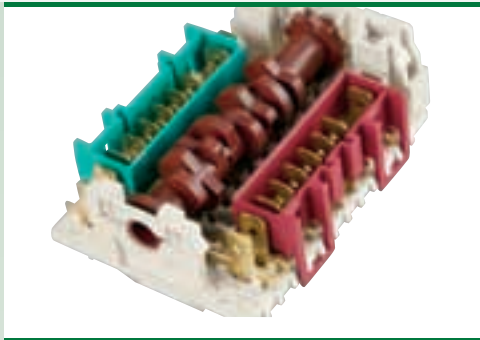


Terminal housing

- Various dimensions of terminal housing: for 2 - 4 - 6 connections.
- Terminal housing available only for single terminal version.

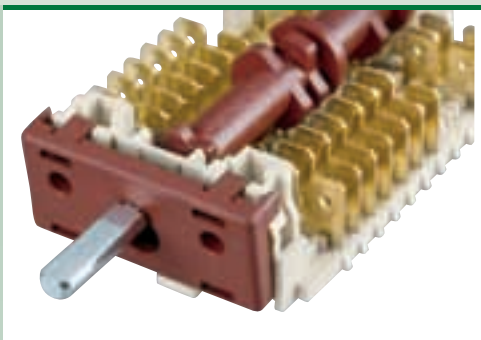


Child lock - push to turn feature

- Push to turn safety feature available.

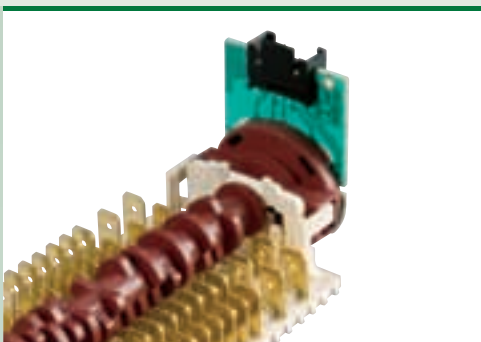

Coupling with encoder

- HE series can be coupled to an electromechanical to control electrical and power signals.

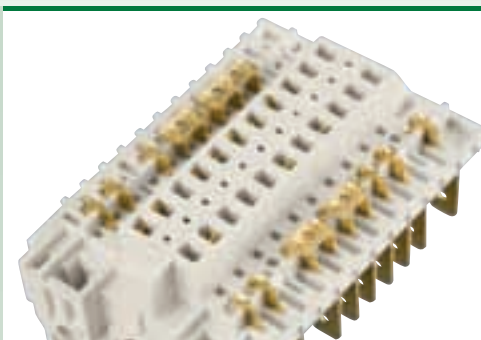

Bridges

- The use of bridges between contacts increases range of combinations.
- For every line the number of bridges can vary between 0 up to 5.
- It can be joined up to 7 contacts.