

MANUALE D'USO L412MA04T1A01

INDICE ARGOMENTI:

DESCRIZIONE

SPECIFICHE TECNICHE

ALIMENTAZIONE DEL DISPOSITIVO E CONNESSIONE AL MODULO LED

MODALITA' DI FUNZIONAMENTO

SLAVE DMX-512/RDM (DEFAULT)

SLAVE DMX-512/RDM CON PARAMETRI

AUTOSET

INGRESSO PUSH (AUTOSET)

MODALITA' POTENZIOMETRO LINEARE 100KOHM (AUTOSET)

MODALITA' 0-10V/1-10V (NON ISOLATO) (AUTOSET)

MODALITA' DALI (AUTOSET)

CONFIGURAZIONE PARAMETRI

L412MA04T1A01

Dimmer monocanale in tensione DALI/PUSH/POT/1-10V/DMX

Dimmer Monocanale con Uscita in Tensione PWM.

Range di alimentazione: 8-53V DC.

Uscita in Tensione PWM 8-53V DC con corrente da 0A a 12A (576W a 48V DC).


Per impostare le modalità di funzionamento occorre dotarsi di interfaccia L392MA00N0A01 venduta separatamente.

Ingressi di Controllo	
Tipologia	Qta
DMX512 RDM	1
Pulsante isolato	1
DALI	1
Potenzimetro Lineare 100K	1
0-10V Passivo (non isolato)	1
1-10V Passivo (non isolato)	1

Uscite di sincronia	
Tipologia	Qta
DMX512	1
PWM	1

CARATTERISTICHE TECNICHE

- Dimmer Monocanale con Uscita in Tensione PWM.
- Range di alimentazione: 8-53V DC.
- Potenza erogata 144W a 12V, 288W a 24V, 576W a 48V.
- Uscita in Tensione PWM 8-53V DC con corrente da 0A a 12A (576W a 48V DC).
- Funzionalità MASTER/SLAVE per sincronia digitale con altri Dimmer Newlab o dispositivi DMX512A compatibili.
- Configurazione di fabbrica: SLAVE DMX512A 1 Canale.
- Per cambiare la modalità di funzionamento occorre l'utilizzo dell'interfaccia L392MA00N0A01 (opzionale).
- Ingressi di Controllo: DMX512 RDM x1, Pulsante isolato x1, DALI x1, Potenzimetro Lineare 100K x1, 0-10V Passivo (non isolato) x1, 1-10V Passivo (non isolato) x1.
- Uscite di sincronia: DMX512 x1, PWM x1.
- Nota su 0-10V(1-10V): questo circuito di controllo non è isolato, utilizzare solo un generatore di segnale isolato 0-10V(1-10V).
- Frequenza PWM: 390 Hz.
- Funzionalità Converter DALI to DMX.
- Intervento Termico: 150 Gradi C. su uC.
- Temperatura stoccaggio Min: -40 Max: 60 Gradi C..
- Temperatura di funzionamento Min: -20 Max: 50 Gradi C..
- Circuito Stampato UL.
- Classe di protezione: IP20.
- Peso: 44 gr.
- Dimensioni Standard 40x80x24.45 mm.
- Dimensioni con Accessori 40x100x24.45 mm.
- Protezione da inversione di polarità.
- Protezione circuito aperto.
- Protezione da picchi tensione.
- Protezione da sovratemperatura.
- Se la tensione di controllo dell'ingresso PUSH è superiore alla tensione SELV è necessario l'utilizzo del coprimorsetto/stringicavo OPZIONALE per

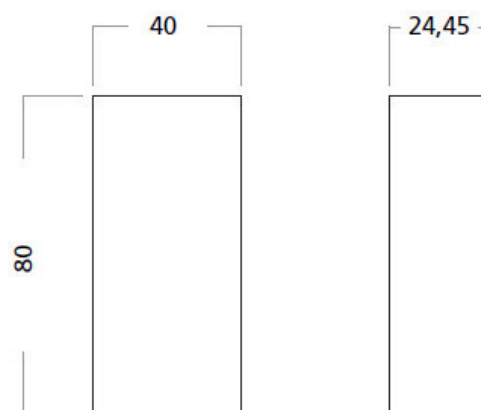


mantenere il prodotto in CLASSE II.

- Utilizzare solo in ambienti asciutti.



CODICE	TENSIONE IN INGRESSO	CORRENTE USCITA (MAX)	N. CANALI IN USCITA	POTENZA MAX IN USCITA	INGRESSI DI CONTROLLO	SCATOLA	DIMENSIONI mm
L412MA04T1A01	8-53V DC	12A	1	576W a 48V DC	DMX512 RDM x1 Pulsante isolato x1 DALI x1 Potenziometro Lineare 100K x1 0-10V Passivo (non isolato) x1 1-10V Passivo (non isolato) x1	SI	40x80 h 24.45

ALIMENTAZIONE DEL DISPOSITIVO E CONNESSIONE AL MODULO LED

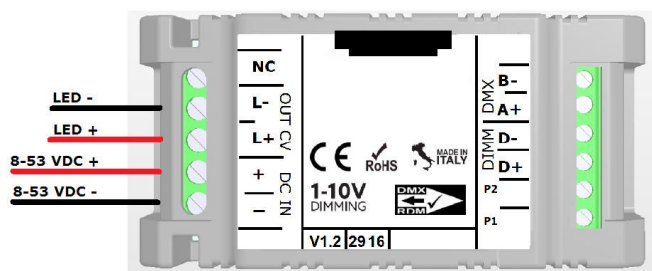

SCHEMA COLLEGAMENTO ALIMENTAZIONE E LED L412MA04T1A01 - FIGURA N. 1

Il dimmer L412MA04T1A01 deve essere alimentato secondo la polarità indicata in FIG. 1 attraverso i morsetti DC IN (+ e -).

Nel caso in cui la polarità di alimentazione venga invertita il dispositivo non subisce nessun danno.

Il LED (LED PWR) presente a bordo scheda segnala la presenza di alimentazione.

Il LED (LED DIM) indica lo stato di dimming dell'uscita

La connessione del carico LED deve essere effettuata utilizzando i morsetti OUT CV (L+ e L-).

MODALITA' DI FUNZIONAMENTO

Il dispositivo può operare in diverse modalità. La programmazione della modalità operativa, oltre che quella di altri parametri di funzionamento (es. indirizzo DMX-512, fade, etc.) può essere effettuata mediante il programmatore opzionale L392MA00N0A01.

Consultare la sezione configurazione parametri di questo manuale o l'applicazione newlabacademy su iOS e Android.


Le modalità supportate sono:

- MODALITA' SLAVE DMX-512/RDM STANDARD (DEFAULT)
- MODALITA' SLAVE DMX-512/RDM CON PARAMETRI (SELEZIONE CURVA DI DIMMING E FADE LOCALI)
- MODALITA' AUTOSET (INGRESSO 0-10V/1-10V (NON ISOLATO), PUSH, POTENZIOMETRO)

La modalità AUTOSET permette l'utilizzo del dispositivo nelle modalità DALI, 0-10V/1-10V, Push e potenziometro, come di seguito illustrato.

In questa modalità il dispositivo opera come convertitore di protocollo trasmettendo il suo stato mediante protocollo DMX-512 (sul canale fisso 1) per sincronia con altri dispositivi DMX-512 collegati.

SLAVE DMX-512/RDM (DEFAULT)

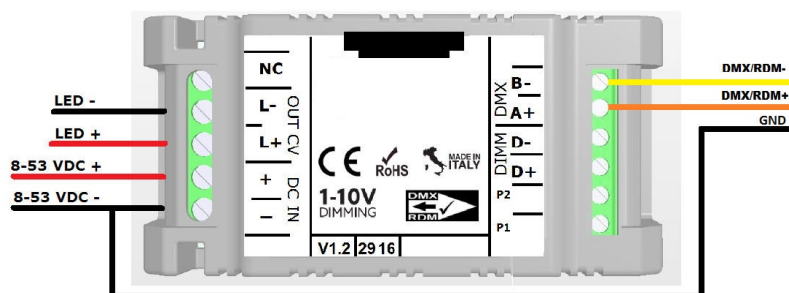

COLLEGAMENTO L412MA04T1A01 A BUS DMX512/RDM - FIGURA N. 2

In questa modalità (DEFAULT) il dispositivo può essere controllato mediante un bus DMX-512.


L'indirizzo DMX (DEFAULT 1) può essere impostato mediante protocollo RDM oppure mediante il programmatore (opzionale) L392MA00N0A01.

Fare riferimento al manuale del programmatore per le modalità.

In questa modalità il dispositivo lavora in CURVA LINEARE e la funzionalità FADE è disabilitata.

ATTENZIONE: PER IL CORRETTO FUNZIONAMENTO DEL BUS DMX E' NECESSARIO COLLEGARE TRA LORO I POLI GND DEI DISPOSITIVI CONNESSI AL BUS. UTILIZZARE IL MORSETTO IN- COME IN FIGURA.

SLAVE DMX-512/RDM CON PARAMETRI

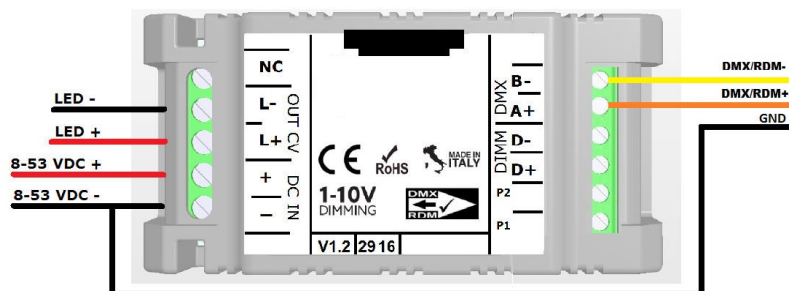

COLLEGAMENTO L412MA04T1A01 A BUS DMX512/RDM - FIGURA N. 3

In questa modalità il dispositivo può essere controllato mediante un bus DMX-512.


L'indirizzo DMX (DEFAULT 1) può essere impostato mediante protocollo RDM oppure mediante il programmatore (opzionale) L392MA00N0A01.

Fare riferimento al manuale del programmatore per le modalità.

A differenza della precedente modalità SLAVE DMX/RDM è possibile selezionare, sempre tramite interfaccia L392MA00N0A01,

la curva di risposta del dispositivo (LOG o LIN) ed abilitare o disabilitare il FADE.

**ATTENZIONE: PER IL CORRETTO FUNZIONAMENTO DEL BUS DMX E' NECESSARIO COLLEGARE TRA LORO I POLI GND DEI DISPOSITIVI CONNESSI AL BUS.
UTILIZZARE IL MORSETTO IN- COME IN FIGURA.**

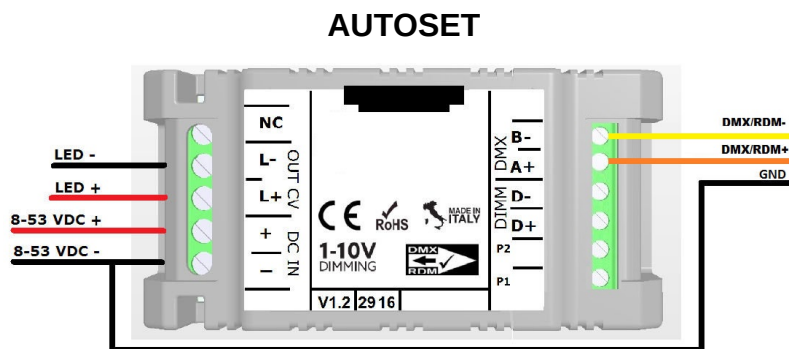


COLLEGAMENTO L412MA04T1A01 A BUS DMX512/RDM - FIGURA N. 4

Per accedere alle funzionalità PUSH, 0-10V/1-10V (NON ISOLATO), DALI e POTENZIOMETRO è necessario impostare la modalità AUTOSET tramite l'interfaccia L392MA00N0A01.

In questa modalità il dispositivo opera come convertitore di protocollo trasmettendo il suo stato mediante protocollo DMX-512 (sul canale precedentemente fisso 1) per sincronia con altri dispositivi DMX-512 collegati.

Riferirsi ai sottocapitoli per dettagli sulle singole tipologie di ingresso.

INGRESSO PUSH (AUTOSET)

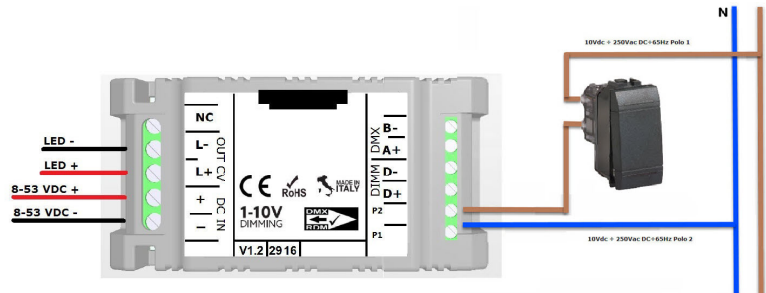

COLLEGAMENTO PULSANTE L412MA04T1A01 - FIGURA N. 5

Per accedere a questa funzionalità è necessario impostare la modalità AUTOSET tramite l'interfaccia L392MA00N0A01.

Al fine di attivare tale modalità di controllo/funzionamento è necessario connettere tra gli ingressi PUSH P1 e PUSH P2 un segnale in tensione continua o alternata (range di tensione: 10Vdc ÷ 250Vac DC÷65Hz) interrotto da un pulsante normalmente aperto (N.O.). Il segnale di ingresso non necessita di polarizzazione.

La corrente massima assorbita dall'interfaccia PUSH è di circa 2mA.

Il dimmer salva lo stato dell'output in maniera da ripristinare il livello impostato in caso di assenza di alimentazione (livello di preset).

Funzionamento interfaccia PUSH

Singolo Click (pressione rapida (<1sec))

- Accende o spegne l'output (ON/OFF).

Doppio Click (pressione rapida (<1sec))


- Imposta massima luminosità (output= 100%)

Long Press (pressione prolungata (>1sec))

- Se il dimmer è in stato di OFF, imposta l'output al valore di minimo (impostabile tramite interfaccia di programmazione, default= 1%)

- Se il dimmer è in stato di ON, la pressione prolungata permette la dimmerazione dell'output (salita/discesa).

MODALITA' POTENZIOMETRO LINEARE 100KOHM (AUTOSET)

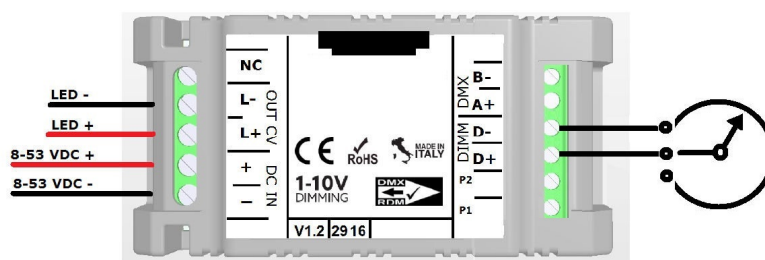

COLLEGAMENTO POTENZIOMETRO L412MA04T1A01 - FIGURA N. 6

Per accedere a questa funzionalità è necessario impostare la modalità AUTOSET tramite l'interfaccia L392MA00N0A01.

Al fine di attivare tale modalità di controllo/funzionamento è sufficiente connettere un potenziometro lineare da 100Kohm tra l'ingresso D+ e D- e disconnettere i restanti ingressi.

Di default la curva di dimming segue un andamento logaritmico* proporzionale al valore di resistenza impostata dal potenziometro.

Un valore di resistenza inferiore ad 5 Kohm viene interpretato come carico spento.


Il valore di massima luminosità si raggiunge al superamento del valore di 95 Kohm.

In caso di distacco del potenziometro, il dimmer imposta l'output al livello salvato (vedi variazione livello di preset).

Il valore di preset è di default zero.

Al primo avvio in questa modalità potrebbe essere necessario impostare l'input con un valore superiore al 50% (55K o superiore su ingresso D- D+) in modo da configurare il dimmer nella modalità potenziometro.

MODALITA' 0-10V/1-10V (NON ISOLATO) (AUTOSET)

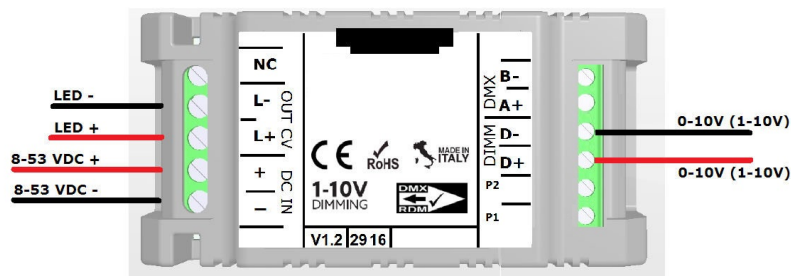

COLLEGAMENTO 0-10V L412MA04T1A01 - FIGURA N. 7

Per accedere a questa funzionalità è necessario impostare la modalità AUTOSET tramite l'interfaccia L392MA00N0A01.

Al fine di attivare tale modalità di controllo/funzionamento è sufficiente connettere il segnale 0-10V/1-10V di controllo tra l'ingresso D+ e D- (facendo attenzione a rispettare la corretta polarità) e disconnettere i restanti segnali di controllo.

La corrente massima assorbita dal dimmer dall'interfaccia 0-10V è di 0,1mA.

Di default la curva di dimming segue un andamento logaritmico* proporzionale alla tensione di controllo.


Un valore di tensione inferiore ad 1V viene interpretato come carico spento.

In caso di distacco del segnale 0-10V/1-10V, il dimmer imposta l'output al livello salvato (vedi Variazione livello di preset).

Il valore di preset è di default zero.

Al primo avvio in questa modalità potrebbe essere necessario impostare l'input con un valore superiore al 50% (5V o superiore su ingresso D- D+) in modo da configurare il dimmer nella modalità 0-10V/1-10V.

MODALITA' DALI (AUTOSET)

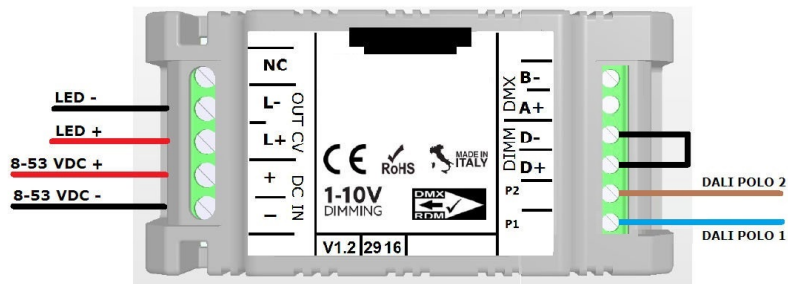

COLLEGAMENTO DALI L412MA04T1A01 - FIGURA N. 8

Per accedere a questa funzionalità è necessario impostare la modalità AUTOSET tramite l'interfaccia L392MA00N0A01.

Al fine di attivare tale modalità di controllo/funzionamento è necessario cortocircuitare gli ingressi D+ e D- e connettere tra gli ingressi DALI/P1 e DALI/P2 il bus DALI.

Il dimmer alla prima ricezione di un pacchetto DALI formattato correttamente si configura in modalità DALI.

Una volta configurato in modalità DALI, e disconnesso dal bus DALI il dimmer passa allo stato POWER ON LEVEL impostato tramite bus DALI.

La corrente max assorbita dal bus DALI è di circa 2mA.

In questa modalità il valore ricevuto sul bus DALI viene ritrasmesso sul bus DMX canale 1

Qui di seguito i comandi standard implementati:

DIRECT ARC POWER
OFF
UP
DOWN
STEP UP
STEP DOWN
RECALL MAX LEVEL
RECALL MIN LEVEL
STEP DOWN AND OFF
ON AND STEP UP
GO TO SCENE (0-15)
RESET
STORE ACTUAL LEVEL IN THE DTR
STORE THE DTR AS MAX LEVEL
STORE THE DTR AS MIN LEVEL
STORE THE DTR AS SYSTEM FAILURE LEVEL
STORE THE DTR AS POWER ON LEVEL
STORE THE DTR AS FADE TIME
STORE THE DTR AS FADE RATE
STORE THE DTR AS SCENE (0-15)
REMOVE FROM SCENE (0-15)
ADD TO GROUP (0-15)
REMOVE FROM GROUP (0-15)
STORE DTR AS SHORT ADDRESS
QUERY STATUS
QUERY BALLAST
QUERY LAMP POWER ON
QUERY LIMIT ERROR
QUERY RESET STATE
QUERY MISSING SHORT ADDRESS
QUERY VERSION NUMBER

QUERY DEVICE TYPE
QUERY PHYSICAL MINIMUM LEVEL
QUERY POWER FAILURE
QUERY CONTENT DTR1
QUERY CONTENT DTR2
QUERY ACTUAL LEVEL
QUERY MAX LEVEL
QUERY MIN LEVEL
QUERY POWER ON LEVEL
QUERY SYSTEM FAILURE LEVEL
QUERY FADE TIME/FADE RATE
QUERY SCENE LEVEL (0-15)
QUERY GROUPS (0-7)
QUERY GROUPS (8-15)
QUERY RANDOM ADDRESS H
QUERY RANDOM ADDRESS M
QUERY RANDOM ADDRESS L

Manuale aggiornato al 03/04/2018

CONFIGURAZIONE PARAMETRI

CLICCA SULLA CONFIGURAZIONE DESIDERATA PER VISUALIZZARE L'IMMAGINE DEL PROGRAMMATORE

Reset														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Reset	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON

Curva Dimming														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Logaritmica	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Lineare	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON

PWM														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
PWM Standard	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
PWM Invertito	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON

Fade														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Fade Off	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Fade On	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON

Cambio Modalità														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Slave DMX 512 / RDM	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Slave DMX 512 / RDM con parametri	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
Autoset (Push, Potenziometro Lineare 100K, 0-10 Volt/1-10 Volt, DALI)	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF

Indirizzo DMX														
Configurazioni	A	B	C	D	1	2	3	4	5	6	7	8	9	10
Indirizzo 1	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 2	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 3	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 4	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 5	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 6	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 7	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 8	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 9	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 10	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 11	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 12	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 13	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 14	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 15	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 16	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 17	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 18	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 19	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF

Indirizzo 20	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 21	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 22	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 23	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 24	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 25	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
Indirizzo 26	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 27	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 28	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 29	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 30	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 31	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
Indirizzo 32	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 33	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 34	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 35	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 36	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 37	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 38	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 39	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 40	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 41	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 42	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 43	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 44	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 45	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 46	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 47	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF
Indirizzo 48	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 49	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 50	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 51	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 52	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 53	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 54	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 55	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 56	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 57	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 58	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 59	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 60	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 61	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 62	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 63	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF
Indirizzo 64	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 65	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 66	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 67	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 68	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 69	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 70	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF

Indirizzo 71	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 72	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 73	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 74	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 75	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 76	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 77	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 78	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 79	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
Indirizzo 80	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 81	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 82	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 83	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 84	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 85	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 86	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 87	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 88	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 89	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 90	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 91	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 92	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 93	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 94	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 95	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF
Indirizzo 96	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 97	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 98	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 99	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 100	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 101	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 102	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 103	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 104	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 105	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 106	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 107	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 108	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 109	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 110	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 111	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF
Indirizzo 112	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 113	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 114	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 115	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 116	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 117	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 118	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 119	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF
Indirizzo 120	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 121	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF

Indirizzo 122	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 123	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 124	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 125	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 126	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 127	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF
Indirizzo 128	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 129	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 130	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 131	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 132	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 133	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 134	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 135	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 136	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 137	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 138	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 139	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 140	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 141	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 142	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 143	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF
Indirizzo 144	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 145	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 146	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 147	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 148	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 149	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 150	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 151	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 152	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 153	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 154	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 155	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 156	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 157	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 158	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 159	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF
Indirizzo 160	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 161	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 162	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 163	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 164	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 165	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 166	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 167	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 168	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 169	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 170	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 171	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 172	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF

Indirizzo 173	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 174	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 175	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF
Indirizzo 176	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 177	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 178	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 179	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 180	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 181	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 182	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 183	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF
Indirizzo 184	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 185	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 186	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 187	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 188	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 189	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 190	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 191	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF
Indirizzo 192	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 193	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 194	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 195	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 196	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 197	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 198	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 199	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 200	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 201	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 202	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 203	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 204	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 205	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 206	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 207	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF
Indirizzo 208	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 209	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 210	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 211	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 212	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 213	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 214	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 215	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF
Indirizzo 216	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 217	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 218	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 219	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 220	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 221	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 222	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF
Indirizzo 223	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF

Indirizzo 224	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 225	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 226	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 227	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 228	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 229	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 230	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 231	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF
Indirizzo 232	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 233	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 234	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 235	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 236	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 237	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 238	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 239	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF
Indirizzo 240	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 241	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 242	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 243	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 244	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 245	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 246	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 247	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF
Indirizzo 248	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 249	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 250	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 251	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 252	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 253	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 254	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 255	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF
Indirizzo 256	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 257	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 258	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 259	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 260	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 261	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 262	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 263	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 264	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 265	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 266	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 267	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 268	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 269	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 270	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 271	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF
Indirizzo 272	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 273	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 274	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF

Indirizzo 275	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 276	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 277	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 278	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 279	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 280	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 281	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 282	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 283	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 284	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 285	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 286	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 287	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF
Indirizzo 288	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 289	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 290	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 291	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 292	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 293	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 294	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 295	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 296	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 297	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 298	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 299	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 300	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 301	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 302	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 303	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF
Indirizzo 304	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 305	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 306	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 307	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 308	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 309	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 310	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 311	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF
Indirizzo 312	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 313	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 314	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 315	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 316	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 317	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 318	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 319	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF
Indirizzo 320	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 321	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 322	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 323	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 324	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 325	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF

Indirizzo 326	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 327	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 328	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 329	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 330	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 331	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 332	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 333	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 334	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 335	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF
Indirizzo 336	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 337	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 338	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 339	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 340	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 341	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 342	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 343	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Indirizzo 344	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 345	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 346	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 347	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 348	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 349	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 350	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 351	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	OFF
Indirizzo 352	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 353	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 354	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 355	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 356	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 357	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 358	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 359	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	OFF
Indirizzo 360	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 361	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 362	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 363	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 364	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 365	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 366	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 367	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	OFF
Indirizzo 368	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 369	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 370	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 371	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 372	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 373	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 374	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 375	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	OFF
Indirizzo 376	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF

Indirizzo 377	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 378	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 379	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 380	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 381	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 382	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 383	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF	ON	OFF
Indirizzo 384	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 385	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 386	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 387	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 388	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 389	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 390	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 391	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 392	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 393	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 394	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 395	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 396	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 397	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 398	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 399	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	OFF
Indirizzo 400	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 401	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 402	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 403	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 404	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 405	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 406	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 407	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	OFF
Indirizzo 408	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 409	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 410	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 411	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 412	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 413	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 414	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 415	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	OFF
Indirizzo 416	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 417	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 418	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 419	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 420	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 421	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 422	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 423	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF	ON	ON	OFF
Indirizzo 424	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 425	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 426	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 427	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF

Indirizzo 428	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 429	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 430	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 431	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	OFF
Indirizzo 432	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 433	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 434	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 435	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 436	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 437	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 438	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 439	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	OFF
Indirizzo 440	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 441	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 442	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 443	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 444	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 445	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 446	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 447	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF	ON	ON	OFF
Indirizzo 448	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 449	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 450	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 451	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 452	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 453	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 454	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 455	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	OFF
Indirizzo 456	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 457	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 458	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 459	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 460	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 461	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 462	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 463	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	OFF
Indirizzo 464	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 465	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 466	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 467	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 468	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 469	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 470	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 471	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	OFF
Indirizzo 472	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 473	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 474	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 475	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 476	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 477	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 478	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	OFF

Indirizzo 479	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF	ON	ON	ON	OFF
Indirizzo 480	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 481	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 482	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 483	OFF	ON	OFF	ON	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 484	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 485	OFF	ON	OFF	ON	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 486	OFF	ON	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 487	OFF	ON	OFF	ON	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	OFF
Indirizzo 488	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 489	OFF	ON	OFF	ON	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 490	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 491	OFF	ON	OFF	ON	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 492	OFF	ON	OFF	ON	OFF	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 493	OFF	ON	OFF	ON	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 494	OFF	ON	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 495	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF	ON	ON	ON	ON	OFF
Indirizzo 496	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 497	OFF	ON	OFF	ON	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 498	OFF	ON	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 499	OFF	ON	OFF	ON	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 500	OFF	ON	OFF	ON	OFF	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 501	OFF	ON	OFF	ON	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 502	OFF	ON	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 503	OFF	ON	OFF	ON	ON	ON	ON	OFF	ON	ON	ON	ON	ON	OFF
Indirizzo 504	OFF	ON	OFF	ON	OFF	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 505	OFF	ON	OFF	ON	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 506	OFF	ON	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 507	OFF	ON	OFF	ON	ON	ON	OFF	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 508	OFF	ON	OFF	ON	OFF	OFF	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 509	OFF	ON	OFF	ON	ON	OFF	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 510	OFF	ON	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 511	OFF	ON	OFF	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	OFF
Indirizzo 512	OFF	ON	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON