

L526MC04R1A01


SSR relay controllable via wifi and voice assistant

SSR relay output device controllable via Wifi and/or push button N.O.
Controllable with Android/iOS app Omni.

Input Controls	
Type	Qty
Not insulated Push button	1
Wifi	1

TECHNICAL NOTES

- SSR relay output device controllable via Wifi and/or push button N.O.
 - Power input voltage range 100-240 VAC.
 - Max Output current 2A RMS.
 - The device is not equipped with earth connection
- Protection against accidental contact with live parts is guaranteed by the enclosure.
- Cross-section of cables 14-30 AWG (0.05-2.08 mmq).
 - Controllable with Android/iOS app Omni.
 - Input Controls: Not insulated Push button x1, Wifi x1.
 - Printed Circuit UL.
 - Protection Class: IP20.
 - Standard Dimension 40x80x24.45 mm.
 - Dimension with accessories 40x100x24.45 mm.
 - Works with Hey Google.
 - Compatible with Amazon Alexa Voice Assistant through the skill Newlab.
 - Works with IFTTT.
 - All connections must be made with non-live devices and carried out by specialized personnel.
 - Use only in dry conditions.
 - Google and all related marks are trademarks of Google Inc. or its affiliates.
 - Amazon, Alexa, and all related marks are trademarks of Amazon.com, Inc. or its affiliates..
 - IFTTT and all related marks are trademarks of IFTTT Inc. or its affiliates.

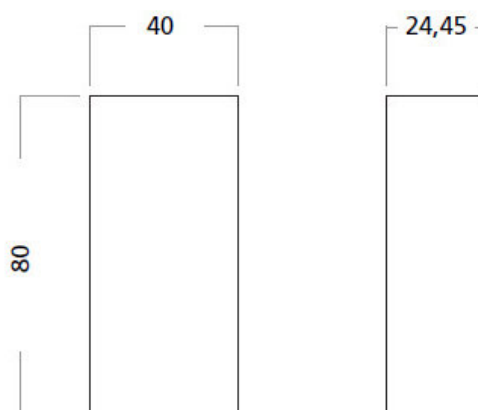

WIFI



CODE	INPUT VOLTAGE	(MAX) OUTPUT CURRENT	CONTROL INPUTS	CASE	DIMENSION mm
L526MC04R1A01	100-240V AC	2A RMS	Not insulated Push button x1 Wifi x1	YES	40x80 h 24.45