




A2

TYPICAL APPLICATIONS	Hairdryers, small appliances
FUNCTIONS	<ul style="list-style-type: none"> Double SPST Double SPDT momentary SPST, illuminated or not + Indicator light SPST + SPCO
CYCLE No.	50.000
CUT OUT	19x22 mm
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand




A 2

DRAWING


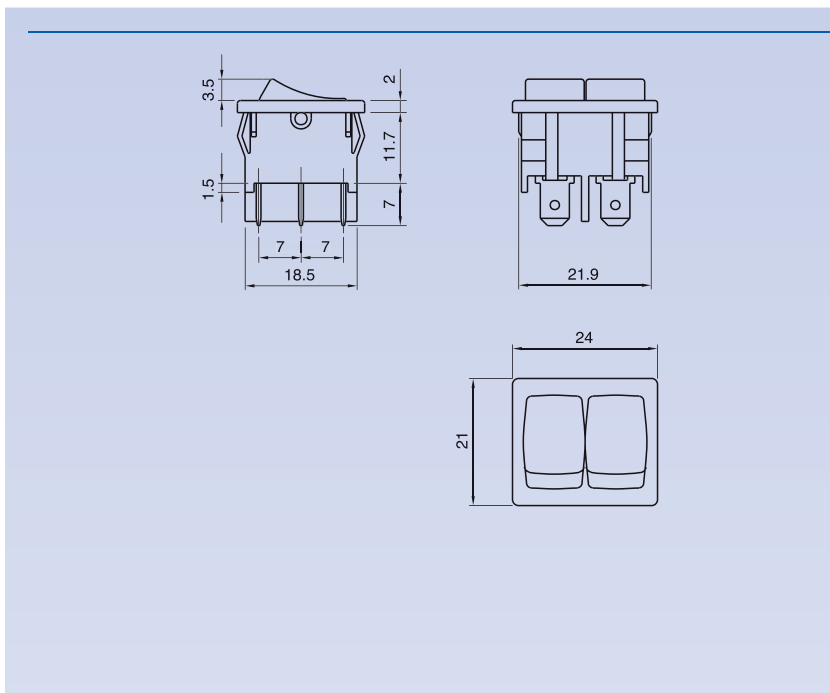



Function K - W

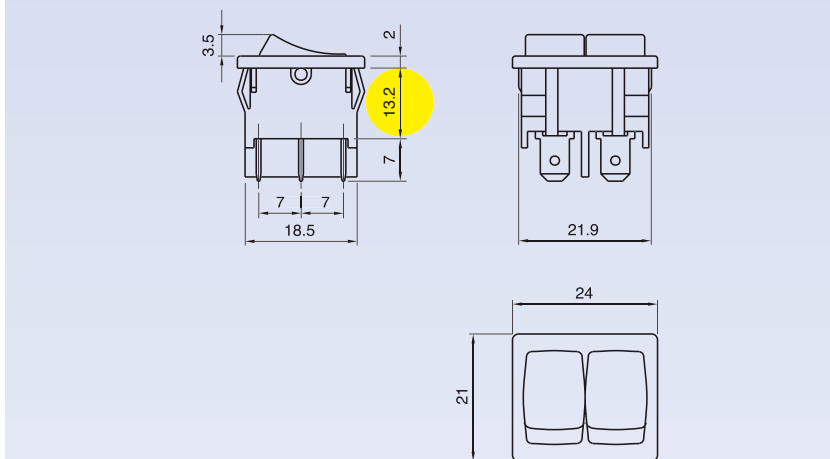

?

TERMINAL



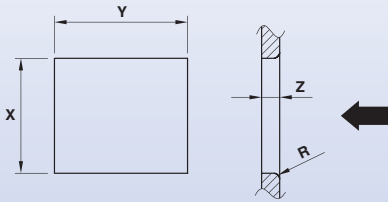

Z	Y	X
0,7 ... 1,25	22,0 ±0,1	19,0 ±0,2
1,25 ... 2,0	22,0 ±0,1	19,3 ±0,2
2,0 ... 3,0	22,0 ±0,1	19,6 ±0,2

TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR L	ROCKER COLOUR R	MARKING COLOUR	MARKING L	MARKING R
A	2							0 0

?	?	?	L ?	R ?	?	L ?	R ?	0	0
---	---	---	-----	-----	---	-----	-----	---	---

FUNCTION

RATING


BODY COLOUR

ROCKER COLOUR


MARKING COLOUR

MARKING


1 Terminal 1




B Terminal 1



G Terminal 1



K Terminal A



W Terminal 1



2

Function B

6 (2) A / 250 VAC
 3 (1) A / 250 VAC - 5E4
 T125/55 °C - T125 °C
 EN 61058

6 A - 125 / 250 VAC
 1/10 HP - 125 VAC
 1/6 HP - 250 VAC
 T105 °C
 UL 1054
 CSA C22.2

3

Function 1 - G - W

10 (4) A / 250 VAC
 6 (4) A / 250 VAC - 5E4
 T125/55 °C - T125 °C
 EN 61058

10 A - 125 / 250 VAC
 1/3 HP - 125 VAC
 1/2 HP - 250 VAC
 T105 °C
 UL 1054
 CSA C22.2

6

Function K

10 (2) A / 250 VAC
 6 (1) A / 250 VAC - 5E4
 T125/55 °C - T125 °C
 µ disconnection
 EN 61058

6 A - 125 / 250 VAC
 1/8 HP - 125 VAC
 1/6 HP - 250 VAC
 T105 °C
 UL 1054
 CSA C22.2

1

black

2

white

X

custom

1

black

2

white

9

red

B

light blue

ILLUMINATED ✨

G

red

H

orange

E

green

L

white

X

custom

0

none

1

black

2

white

5

grey

7

light blue

8

red

9

orange

X

custom

0



1



2



3



4



5



6



8



9



C



F



G



S



R



Z



X



?

