



CS

TYPICAL APPLICATIONS Hairdryers

FUNCTIONS ■ 2x SPST (3 positions 0-0/0-1/1-1)

CYCLE No. 50.000

CUT OUT See drawing

AMBIENT TEMPERATURE 85 °C

GWT 850 °C




C

S


?

DRAWING


TERMINAL

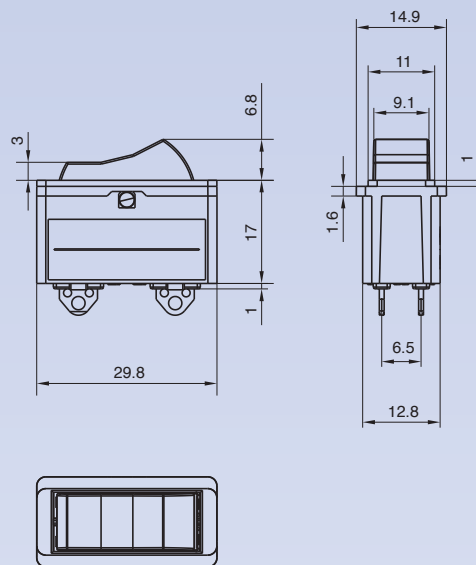


G



H



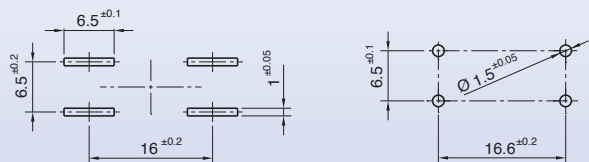

	TERMINAL	FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR	MARKING	MARKING COLOUR		
C	S							0	0

?	?	?	?	?	?	?	0	0
---	---	---	---	---	---	---	---	---

FUNCTION RATING BODY COLOUR ROCKER COLOUR MARKING MARKING COLOUR

1

2

16 A / 250 VAC
 10 A / 250 VAC - 5E4
 T85/55 °C
 µ disconnection
 EN 61058

16 A / 125 VAC
 T65 °C
 UL 1054

1 ■
 black

1 ■
 black

0

A

C

X

0
 none

2
 white

X **?**
 custom