




# RMASK

<b>TYPICAL APPLICATIONS</b>	Steam cleaners, ironing generators
<b>FUNCTIONS</b>	<ul style="list-style-type: none"> <li>■ SPST, illuminated</li> <li>■ DPST, illuminated or not</li> </ul>
<b>CYCLE No.</b>	50.000
<b>CUT OUT</b>	ø 20 mm
<b>AMBIENT TEMPERATURE</b>	125 °C
<b>GWT</b>	850 °C
<b>GWT NO FLAME (&lt;2sec)</b>	750 °C




R M A S K ?


## DRAWING

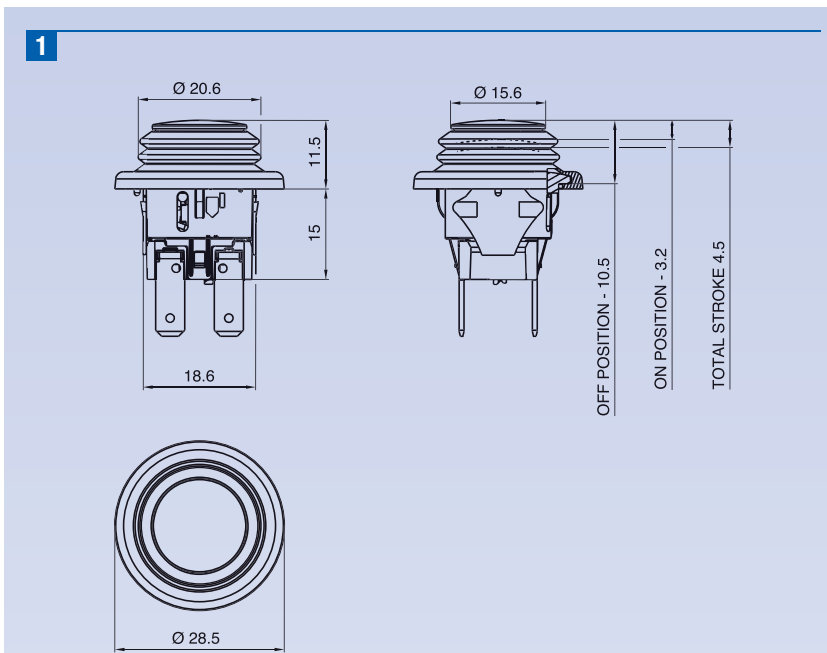

?

## TERMINAL



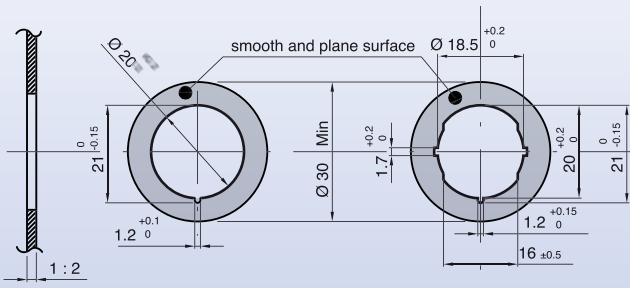


R	M	A	S	K	DRAWING	TERMINAL	FUNCTION	RATING	RUBBER COLOUR	BUTTON COLOUR	0	0	0	0	0
---	---	---	---	---	---------	----------	----------	--------	---------------	---------------	---	---	---	---	---


?

**FUNCTION**


2



6



8



?

**RATING**

C

16 (6) A / 250 VAC  
 12 (10) A / 250 VAC  
 8 (8) A / 250 VAC - 5E4  
 T125 / 55 °C  
 EN 61058

16 A / 125 VAC  
 16 A / 250 VAC  
 1 / 2 HP - 125 VAC  
 3 / 4 HP - 250 VAC  
 T65 °C (T100 °C on demand)  
 UL 1054

?

**RUBBER COLOUR**

1

black

?

**BUTTON COLOUR**

N

black

M

white

ILLUMINATED ✨

E

green

F

blue

G

red

H

orange

X

custom

?

0 0 0 0 0