


DIN-Rail TB

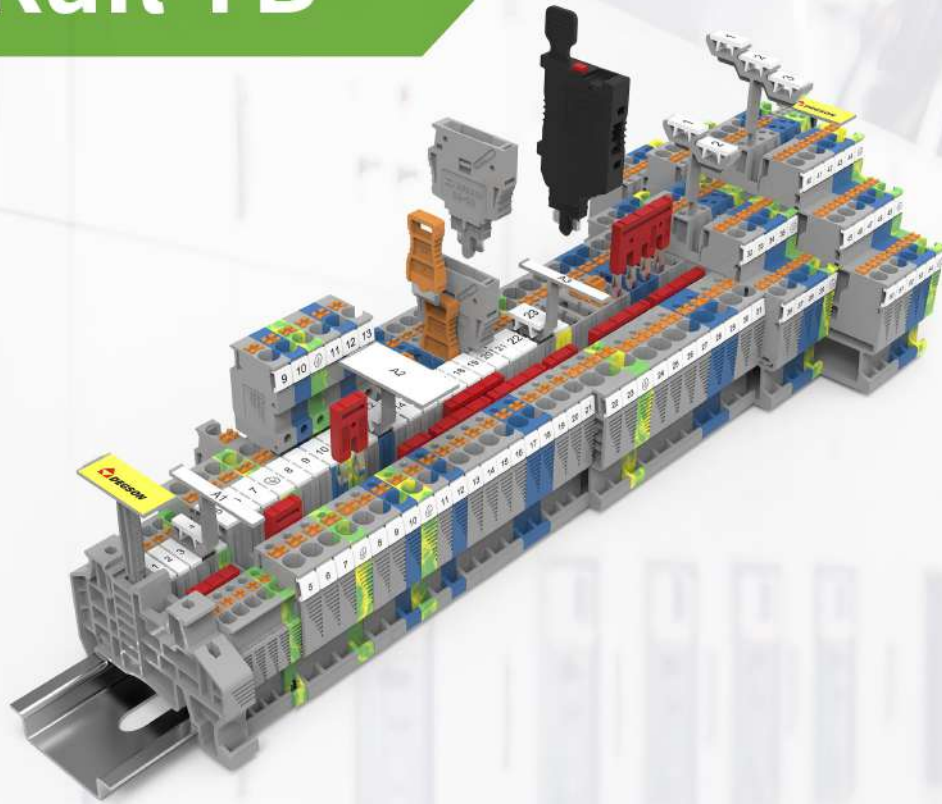

Features

- Various connection method: Push-in, Spring-cage and screw type connection.
- Full product line: Multi-conductor, Multi-level, Fuse, Diode, Test disconnect, disconnect type etc.
- Max. connection capacity: 95mm², Max. rated current: 232A, Max. rated voltage: 1000V.

Field Application

Electric power, railway transport, elevator, industrial automation, new energy, machinery etc.

