







# FV122 B

**Screw-to-Tab  
Terminal Block (6 poles)  
with integrated earth bracket**



## TECHNICAL DATA


	IEC Standards	American Standards
<b>Ratings</b>	450V - 40A	600V - 40A
<b>Wire size</b>	6.0 sqmm	22 ÷ 8 AWG
<b>Working Temperature</b>	- 5 ÷ 150°C (short time 180°C)	23 ÷ 239°F
<b>Plastic Material</b>	Polyamide PA6.6 glass filled brown colour, UL94 V0, GWT 960°C	
<b>Metal Parts</b>	M5 zinc plated steel captive screw; 6.3 x 0.8 zinc plated steel tab insert; shunt insert and other parts made in zinc plated steel	
<b>Marking</b>	1 - 2 - 3 - 4 - 5 - 	
<b>Accessories</b>	PA269	

Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	E 2250	6.0 sqmm - 450V - 40A - 150°C	EN 60998-1; EN 60998-2-1
	E76048 vol. 1 sec. 4	22 ÷ 8 AWG - 600V - 40A - 115°C	UL 1059
	LR 40455	22 ÷ 8 AWG - 600V - 40A	CSA C22-2 N.158-1987; E.C.N 584B

## PACKAGING

Type	P-N	Pack.	Dim. Pack. (LxHxP)	Weight (Kg)
FV 122 B	300851	200	40x20x40	15

DIMENSIONAL  
DRAWING

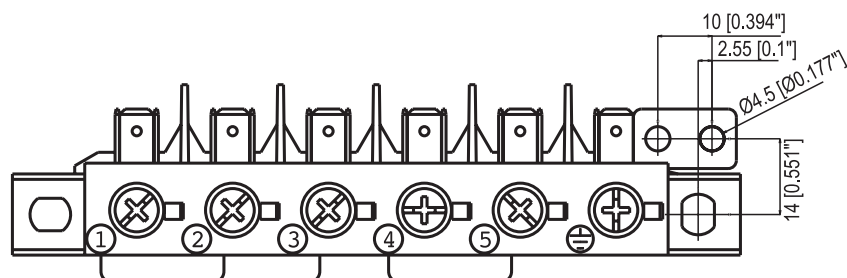

For other dimensions  
see FV122 product file.

