






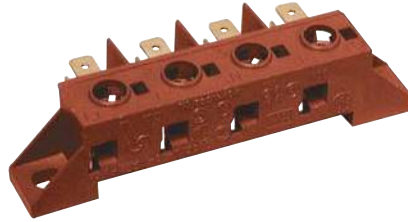

FV173

**Screw-to-Tab
Terminal Block (4 poles)**



TECHNICAL DATA

| | IEC Standards | American Standards |
|----------------------------|--|--------------------|
| Ratings | 450V - 40A | 600V - 40A |
| Wire size | 6.0 sqmm | 22 ÷ 8 AWG |
| Working Temperature | - 5 ÷ 150°C (short time 180°C) | 23 ÷ 239°F |
| Plastic Material | Polyamide PA6.6 glass filled brown colour, UL94 V0, GWT 960°C | |
| Metal Parts | M5 zinc plated steel captive screw; 6.3 x 0.8 zinc plated steel tab insert; shunt insert and other parts made in zinc plated steel | |
| Marking | L1 - L2 - N -  | |
| Accessories | PA269 | |

| Approvals | File Nr. | Ratings (sqmm/AWG - V - A - T) | Standard References |
|---|----------------------|---------------------------------|----------------------------------|
|  | E 2250 | 6.0 sqmm - 450V - 40A - 150°C | EN 60998-1; EN 60998-2-1 |
|  | E76048 vol. 1 sec. 4 | 22 ÷ 8 AWG - 600V - 40A - 115°C | UL 1059 |
|  | LR 40455 | 22 ÷ 8 AWG - 600V - 40A | CSA C22-2 N.158-1987; E.C.N 584B |

PACKAGING

| Type | P-N | Pack. | Dim. Pack. (LxHxP) | Weight (Kg) |
|--------|--------|-------|--------------------|-------------|
| FV 173 | 300899 | 300 | 40x20x40 | 11.5 |

DIMENSIONAL
DRAWING

