



# MORSETTIERA VITE/FASTON 5 POLI + TERRA KL200E

SCREW TO TAB TERMINAL BLOCK WITH 5 POLES + GROUND KL200E



## DATI TECNICI / TECHNICAL DATA



	EUROPA	USA
Sezione cavo / Cable section	1,5 ÷ 6,0 mm <sup>2</sup>	18-8 AWG
Tensione nominale / Nominal Voltage	450 V	300 V
Corrente max / Max. Rating	41 A	
Temp. d'esercizio / Working Temperature	T 150°C	T 130°C
Grado di protezione / Protection degree	IP 00	
Corpo isolante / Plastic material	PA66 - GF25% - CLASS V-0 - GWT 750°C	
Numero poli / Number of poles	5 + E	
Coppia di serraggio / Tightening torque	0.5-1.0 Nm - Max. 2.5 Nm	
Dima di foratura / Cut out	Vedi disegno tecnico / Refer to technical drawing	
Parti metalliche / Metal parts	M6 zinc plated steel screw; 6,3X0,8 zinc plated steel tab insert; zinc plated steel grounding tab.	

Approvals	Standard References
VDE 	DIN EN 60998-1:2005-03; EN 60998-1:2004; DIN EN 60998-2-1: 2005-03; EN 60998-2-1:2004 DIN EN 61210 2011-06; EN 61210:2010
UL CSA 	1-UL Standard: UL 1059 Standard for terminal blocks Edition 4 Rev.Date 2011-10-14 2-Canadian Standard: CSA C22.2 NO.158-10 terminal blocks Edition 3-Issue Date 2010-03-01



## PACKAGING

Type	Poli / Poles	P-N	Pack.	Peso / Weight	Misure / Size
KL200 5P+E (T6)	5 + E	3MRN07001816	150 pz.	10,44 Kg.	400x300x195mm


**DISEGNO TECNICO / TECHNICAL DRAW**

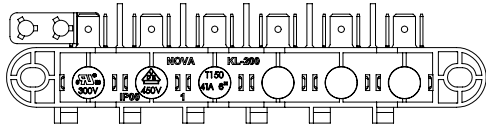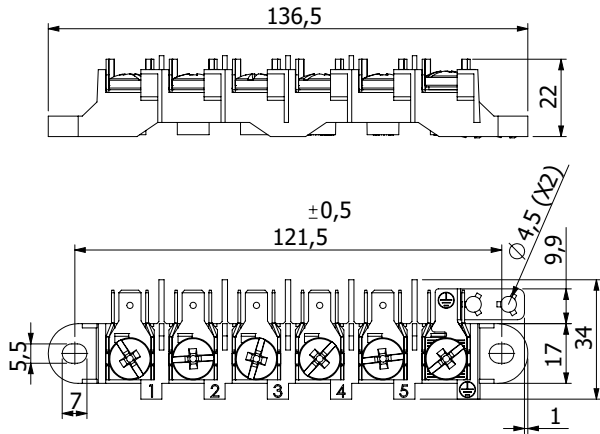

**Panel Cut Out**

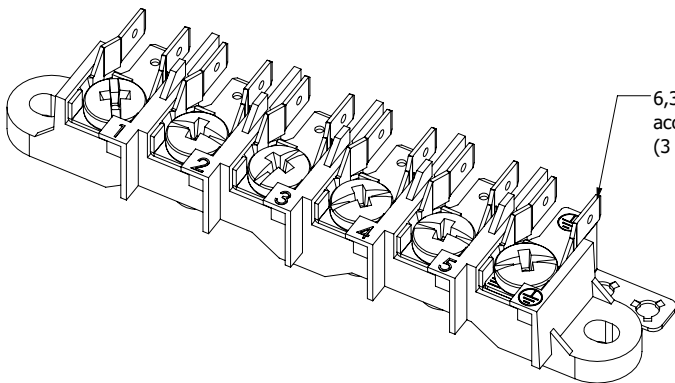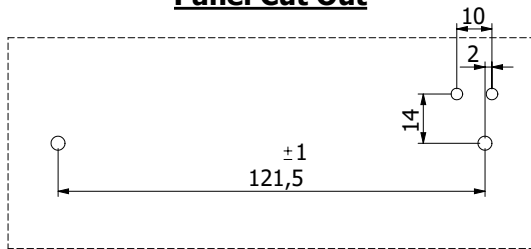

6,3x0,8 tab terminal  
acc. to EN61210  
(3 outlet per pole)

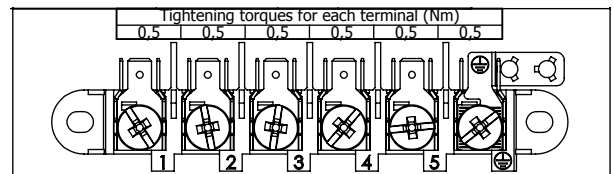

**Product Code : 07 0018 16**

Earth Terminal	94 0391 01	1	Approvals: VDE+UL (a)
Screw (Combi)	05 0016 01	6	
Terminal	94 0035 01	6	
Body (Black) (a)	94 0202 02	1	Cut Out: Type 4
<b>DESC.</b>	<b>NOVA CODE</b>	<b>QTY</b>	