MORSETTIERA VITE/FASTON 6 POLI KL200 CON PONTI

SCREW TO TAB TERMINAL BLOCK WITH 6 POLES KL200 WITH SHUNT

DATI TECNICI / TECHNICAL DATA

	EUROPA	USA
Sezione cavo / Cable section	1,5 ÷ 6,0 mm²	18-8 AWG
Tensione nominale / Nominal Voltage	450 V	300 V
Corrente max / Max. Rating	41 A	
Temp. d'esercizio / Working Temperature	T 150°C	T 130°C
Grado di protezione / Protection degree	IP 00	
Corpo isolante / Plastic material	PA66 - GF25% - CLASS V-0 - GWT 750°C	
Numero poli / Number of poles	6	
Coppia di serraggio / Tightening torque	*0.5-1.0 Nm - Max. 2.5 Nm*	
Dima di foratura / Cut out	Vedi disegno tecnico / *Refer to technical drawing*	
Parti metalliche / Metal parts	*M6 zinc plated steel screw; 6,3X0,8 zinc plated steel tab insert; zinc plated steel grounding tab; Shunt insert made in copper (where assembled).*	

Approvals		Standard References
VDE		DIN EN 60998-1:2005-03; EN 60998-1:2004; DIN EN 60998-2-1: 2005-03; EN 60998-2-1:2004 DIN EN 61210 2011-06; EN 61210:2010
UL CSA		1-UL Standard: UL 1059 Standart for terminal blocks Edition 4 Rev.Date 2011-10-14 2-Canadian Standard: CSA C22.2 NO.158-10 terminal blocks Edition 3-Issue Date 2010-03-01

PACKAGING

Type	Poli / Poles	P-N	Pack.	Peso / Weight	Misure / Size
KL200 6 WAY (3BK)	6	3MRN07001814	200 pz.	14,28 Kg.	300x400x270mm

DISEGNO TECNICO / TECHNICAL DRAW

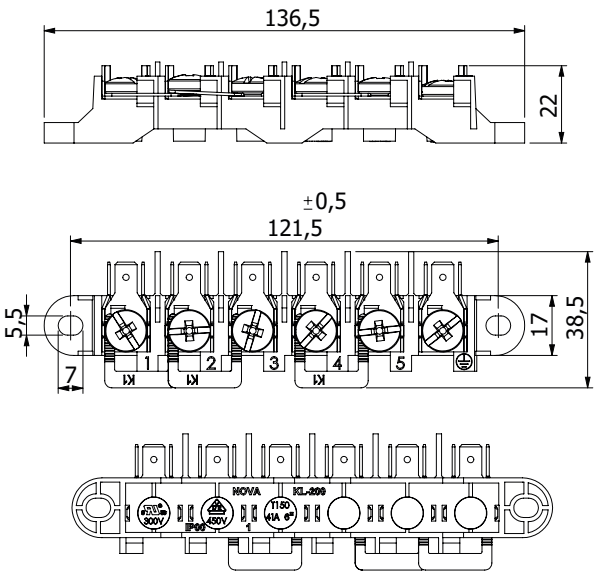

Panel Cut Out

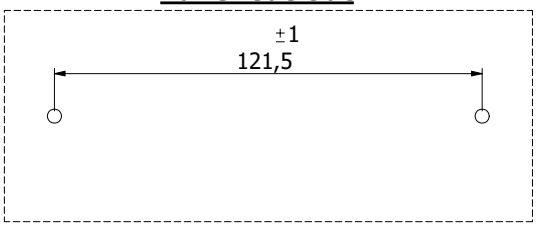

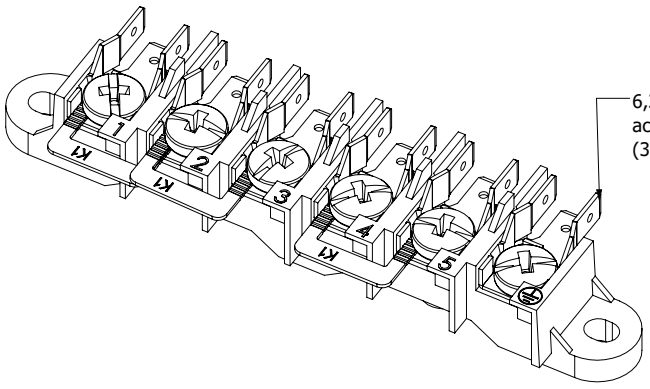

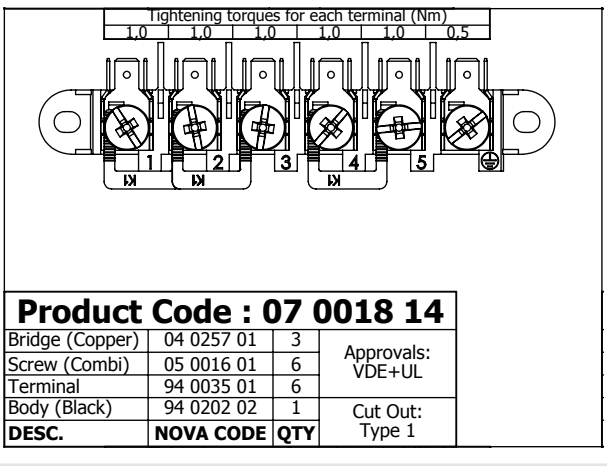

Product Code : 07 0018 14			
Bridge (Copper)	04 0257 01	3	Approvals: VDE+UL
Screw (Combi)	05 0016 01	6	
Terminal	94 0035 01	6	
Body (Black)	94 0202 02	1	Cut Out: Type 1
DESC.	**NOVA CODE**	**QTY**	