






# PA244N

**Terminal box with integrated cable clamp and earth bracket**



## TECHNICAL DATA

	IEC Standards	American Standards
<b>Versions</b>	3 poles	
<b>Ratings</b>	450V - 16A	300V - 16A
<b>Wire size</b>	1.5 sqmm	18 ÷ 14AWG
<b>Working Temperature</b>	- 5 ÷ 125°C (short time 155°C)	23 ÷ 221°F
<b>Plastic Material</b>	Polyamide PA6.6 black colour, UL94 V2, GWT 960°C	
<b>Metal Parts</b>	M4 zinc plated steel screw; 6.3 x 0.8 zinc plated steel tab insert; other parts made in zinc plated steel	
<b>Protection degree (IP)</b>	IP 30	
<b>Cable section</b>	3 x 0.75 sqmm ÷ 3 x 1.5 sqmm	
<b>Cable Clamp Screw</b>	3.5 x 9.5 mm (0.14" x 0.37") HI-LO	


Approvals	File Nr.	Ratings (sqmm/AWG – V – A – T)	Standard References
	EG 912	1.5 sqmm - 450V - 16A – 125°C	EN 60998-1; EN 60998-2-1; EN 61210; EN60335-1
	4246 ÜG	1.5 sqmm - 450V - 16A	DIN EN 60335-1, /A12, /A13, /A14; DIN EN 60998-1; DIN EN 60998-2-1; DIN EN 61210 (VDE 0613)
	E 208213 vol. 1 sec. 1	18 ÷ 14 AWG - 300V - 16A (UR) 14 A (CUR) – 130°C	UL 1977; CNS C22-2 N.182.3-1987





# PA244N

**DIMENSIONAL  
DRAWING**

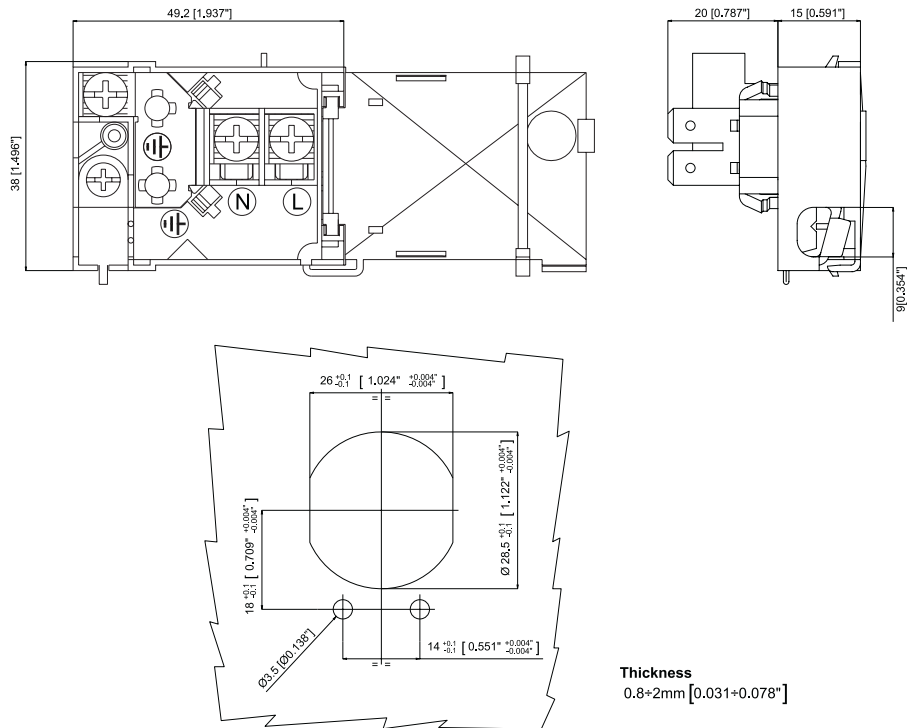

**PACKAGING**

Type	P-N	Pack.	Dim. Pack. (LxHxP)	Weight (Kg)
PA 244 N	500420A	400	40x39x40	15

