

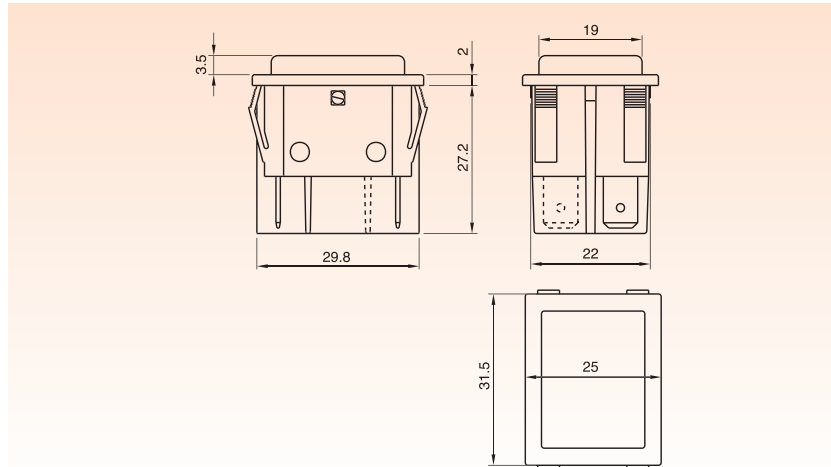


B7


FUNCTION	Indicator light SX82 series
AMBIENT TEMPERATURE	120 °C
GWT	850 °C
GWT NO FLAME (<2sec)	650 °C

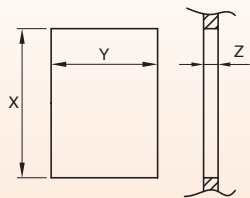

B
7

DRAWING


?

TERMINAL

1





Z	Y	X
0,75 ... 1,25	22,0 ±0,2 0	30,0 0 -0,1
1,25 ... 2,0	22,0 ±0,2 0	30,2 0 -0,1
2,0 ... 3,0	22,0 ±0,2 0	30,6 0 -0,2
3,0 ... 4,0	22,0 ±0,2 0	30,8 0 -0,2

TERMINAL	FUNCTION	RATING	BODY COLOR	LENS COLOR						
B	7				0	0	0	0	0	0

?	?	?	?	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---

FUNCTION

1



RATING

2

200 - 250 VAC
T120 °C
VDE 710

200 - 250 VAC
T65 °C
UL 496
CSA C22.2

BODY COLOR

1

black

X

?

custom

LENS COLOR

ILLUMINATED ✨

G

red

H

orange

E

green

X

?

custom