

2CH with encoder



TYPICAL APPLICATIONS	Electronic and electrical function selector
WIRING DIAGRAMS	■ On demand
CYCLE No.	30.000
AMBIENT TEMPERATURE	85 °C
ADDITIONAL FEATURES	■ Solution combining selector and encoder functions, that allows to improve flexibility and compactness


Solution combining selector and encoder functions, that allows to improve flexibility and compactness.

Rating

16 (6) A / 250 VAC
 10 (2) A / 400 VAC
 18 A / 250 VAC
 6 (4) A / 250 VAC
 T 150 °C

3/4 HP / 125 VAC
 16 A / 250 VAC
 13.8 A / 250 VAC
 T 85 °C

According to EN61058-1
 standard

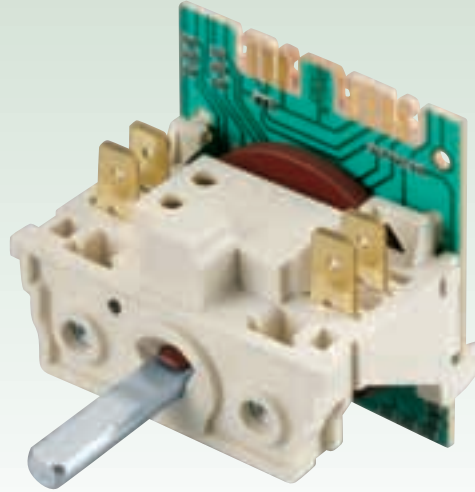

DIMENSIONS

