

5HE 7TAKT DUO




TYPICAL APPLICATIONS	Hobs control
WIRING DIAGRAMAS	7 positions
GWFI	850 °C
GWFI	750 °C

This series is composed of two 5HE 7TAKT rotary selectors, 3 different distances of axis available (55, 60 and 65 mm). Each selector has 7 positions, electric rating up to 12A and different mounting solutions. Duo block permits to make the wiring easier.

- Standard connecting with single terminals 6,3 mm
- Different mounting solutions available: snap-in, nuts or central mounting
- Metal or plastic shafts with different lengths
- Rast 6,5 multiple connection available
- Metal or plastic shafts with different lengths:
(16 - 31 mm)

EXAMPLE OF 5HE 7TAKT DUO WITH NUTS

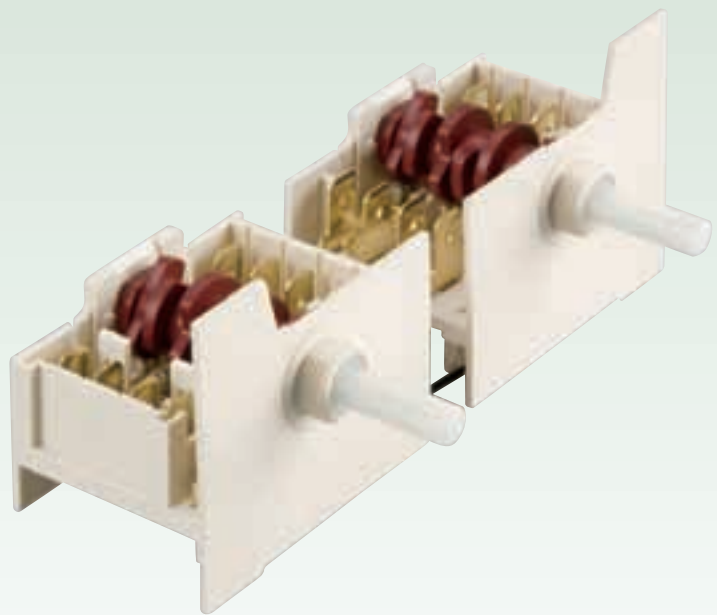


Rating
12 A / 400 VAC 30E3
T150 °C

16 A / 250 VAC
T120 °C

According to EN61058-1
standard


TECHNICAL FEATURES

Various distances of axis available:
55, 60 and 65 mm.

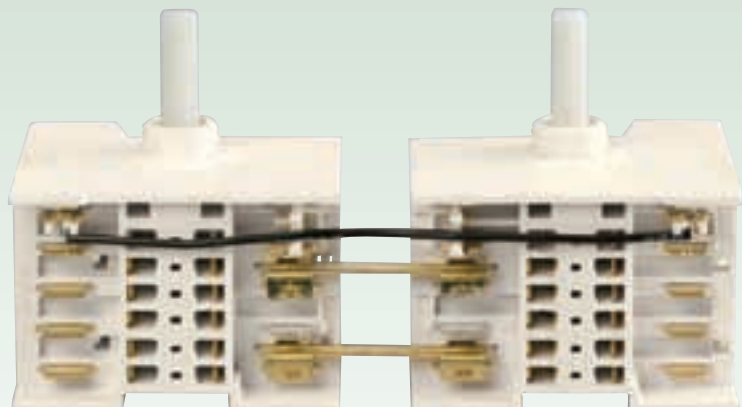


DIMENSIONS

Screw fixing version

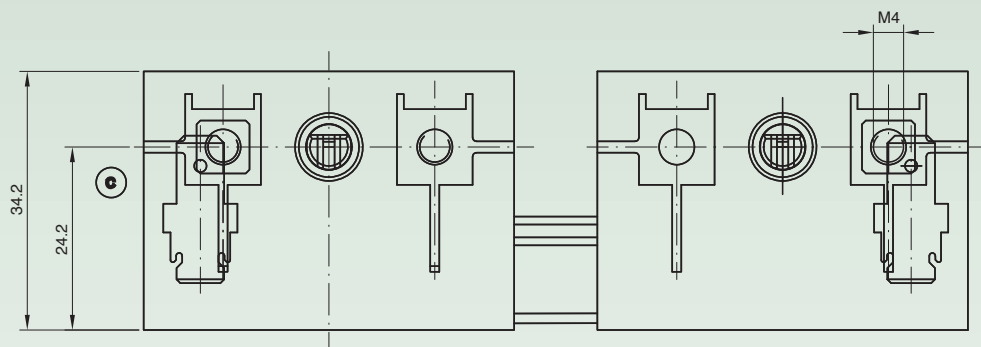

60 mm interaxis version
(55 and 65 mm available)

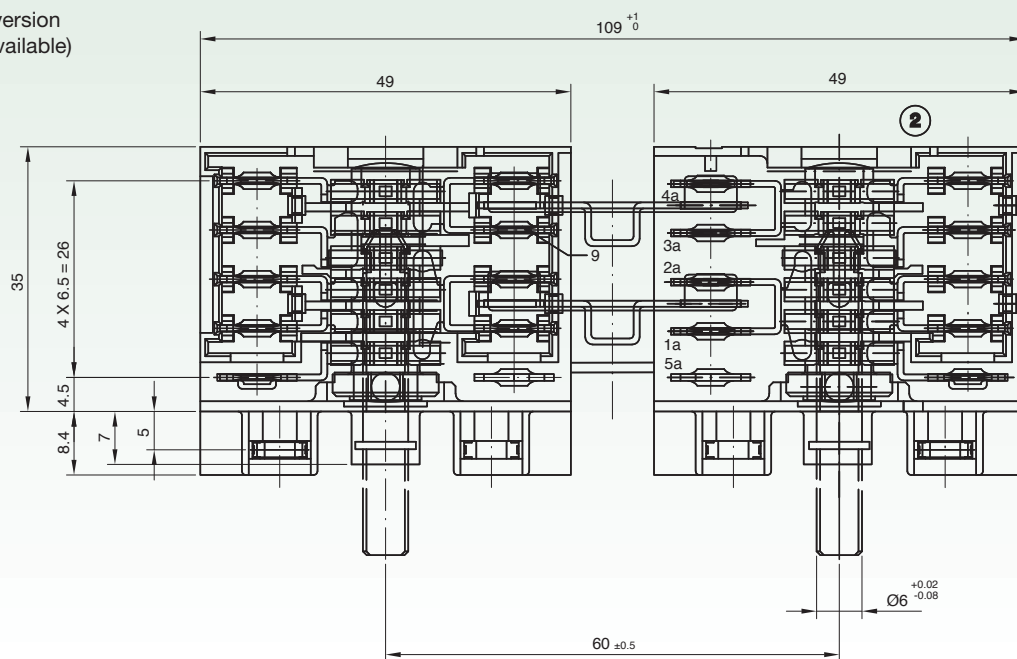

CONTACT SEQUENCE

Pos.	Ang.	P3		P1		P2	
		5a	1	2	3-3	4	
0	0°						
1	51,4°	■	■	■	■	■	
2	102,8°	■		■	■	■	
3	154,2°	■			■		
4	205,6°	■		■		■	
5	257,0°	■			■	■	
6	308,4°	■	■		■		

Pos.	Ang.	5a		1a-2a		3a-4a	
		S	1	2	3-3	4	
0	0°						
1	51,4°	■	■	■		■	
2	102,8°	■		■		■	
3	154,2°	■		■		■	
4	205,6°	■		■		■	
5	257,0°	■			■	■	
6	308,4°	■	■			■	