


# 5HE 4 BLOCK

<b>TYPICAL APPLICATIONS</b>	Hobs control
<b>WIRING DIAGRAMS</b>	7 positions
<b>GWFI</b>	850 °C
<b>GWFI</b>	750 °C



This solution integrates all wirings of four 5HE 7TAKT in a single body; robustness, compactness and easy mounting are its best features.

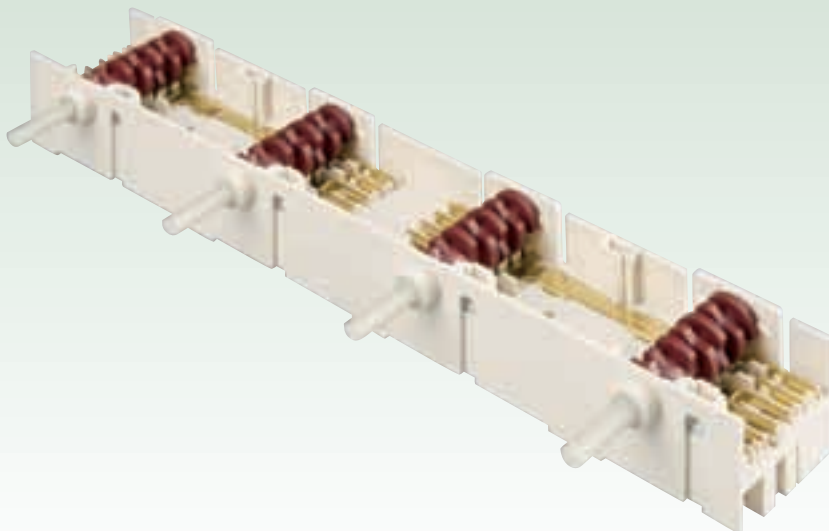

**Rating**  
12 A / 400 VAC - 30E3  
T150 °C

16 A / 250 VAC  
T120 °C

According to EN61058-1  
standard

## DIMENSIONS

### 2 versions:

L = 247.35  
D = 65 ±0.2

L = 230.45  
D = 60 ±0.2

