

L419MA00T1A01

Mono channel optical dimmer costant voltage


Monochannel Dimmers with Output Voltage PWM.
Input Range: 8-28V DC.
Output Voltage PWM 8-28V DC with current from 0A to 2.5A (60W at 24V DC).

Input Controls	
Type	Qty
Optical Sensor	1

Output Sync	
Type	Qty
PWM	1

TECHNICAL NOTES

- Monochannel Dimmers with Output Voltage PWM.
- Input Range: 8-28V DC.
- Output Voltage PWM 8-28V DC with current from 0A to 2.5A (60W at 24V DC).
- Input Controls: Optical Sensor x1.
- Output Sync: PWM x1.
- PWM Frequency: 350 Hz.
- Printed Circuit UL.
- Protection Class: IP20.
- Standard Dimension 9.9x49.5x4 mm.
- Reverse polarity protection.
- Open circuit protection.
- Surge voltage protection.
- Use only in dry conditions.

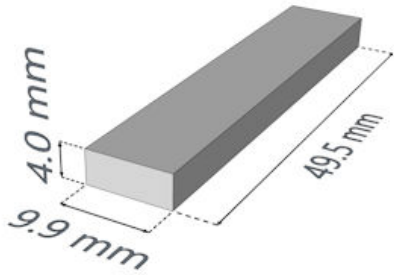

CODE	INPUT VOLTAGE	(MAX) OUTPUT CURRENT	N. OUTPUT CHANNELS	MAX OUTPUT POWER	CONTROL INPUTS	WIRING	DIMENSION mm
L419MA00T1A01	8-28V DC	2.5A	1	60W at 24V DC	Optical Sensor x1	NO	9.9x49.5 h 4
L419MA10T1A01	8-28V DC	2.5A	1	60W at 24V DC	Optical Sensor x1	YES	9.9x49.5 h 4