

2835 STRIP LED 128LED/m 14,4W/m 48V 10m

DATI TECNICI / SPECIFICATIONS:

LED: 128 LED/m
Strip dimension: 10 x 1,5 x 10.000 mm
Working voltage: 48VDC
 IP: 20
Power: 14,4W/m
Luminous flux: 1900 lm/m
Module dimension: 125,0 mm
LED distance: 7,8 mm
Working temp.: -20 +45°C
Stocking temp.: 0 +60°C

CRI **90**



LIFETIME EXPECTANCY
(L70B10) 65000 h @ T45°C

Garanzia / Warranty **5 anni** years



COD.	DESCRIZIONE / DESCRIPTION	IP	CRI	CCT (K)	MOD. LED	VOLTAGE	POWER	LUMEN
3SLCHFAWW12803E12	STRIP 1280 LED WW 144W IP20	20	90	2200	2835	48VDC	144W	15960
3SLCHFAWW12803E17	STRIP 1280 LED WW 144W IP20	20	90	2700	2835	48VDC	144W	17320
3SLCHFAWW12803E10	STRIP 1280 LED WW 144W IP20	20	90	3000	2835	48VDC	144W	17480
3SLCHFANW12803E10	STRIP 1280 LED NW 144W IP20	20	90	4000	2835	48VDC	144W	18620

Accessori / Accessories pag. 121

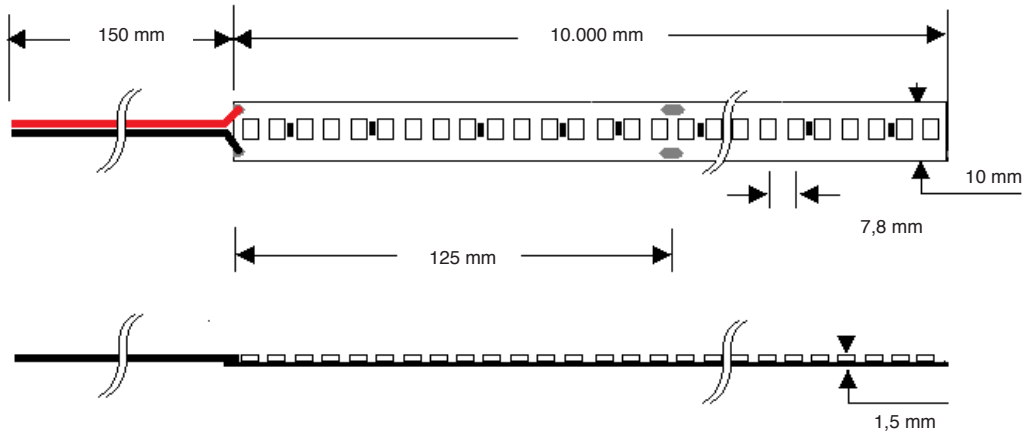

ATTENZIONE / WARNING: Per la tipologia e la potenza espressa dalla strip, si raccomanda di dotare la stessa di adeguata dissipazione e di incollarla utilizzando il biadesivo termo conduttivo direttamente sulla superficie dissipante. (Due to the heating generated, it is recommended to dissipate it in a properly dissipating aluminum surface).